


CHR[®] Pressure Sensitive Adhesive Tapes

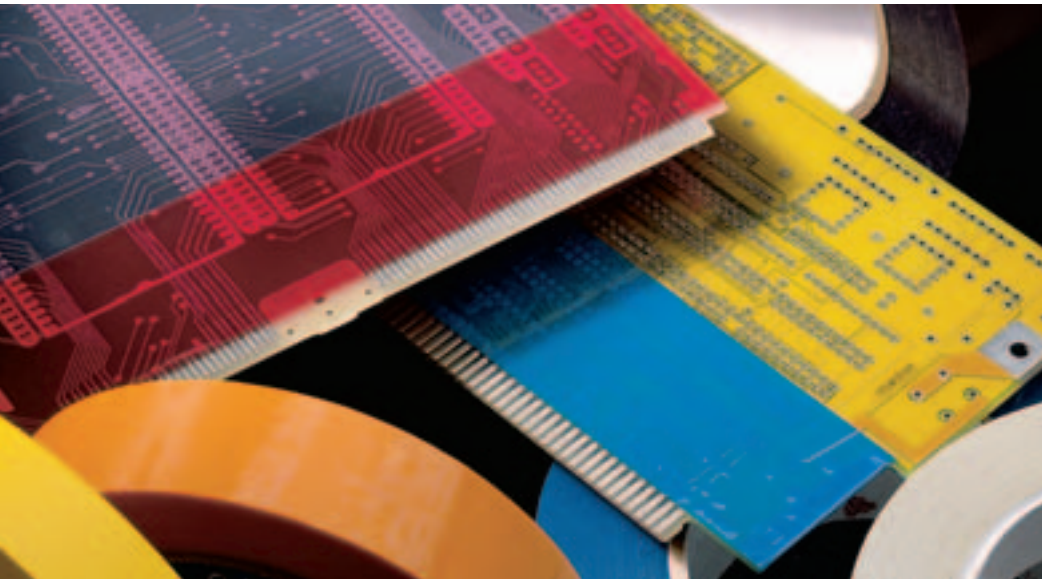

Printed Circuit Board Fabrication Tapes

Features/Benefits

- Prevents Plating Solution Undercutting
- Stands Up to Multiple Operating Cycles
- No Re-work Required
- No Adhesive Residue
- Greater Operator Safety
- Excellent Temperature and Chemical Resistance

M717 Tin Lead Stripping Plating Tape

Plating tape M717 is specifically designed for Gold Tab Plating operations to mask off circuitry above the contact fingers. M717 has a thick and conformable adhesive, which prevents leakage from stripping and plating chemicals. This product is used in the most demanding applications requiring high performance and close tolerances. M717 is specially cured and will not leave an adhesive residue, eliminating costly clean-ups. M716, which protects circuitry from caustic fumes, is an excellent complement to M717, and is attached above M717 on the circuit board during the plating process. M717 is available in red.

M716 Fume Protection Tape

Fume protection tape M716 protects the circuitry from chemical splashes and fumes during Gold Tab Plating operations. This cost-effective, low-adhesion tape has excellent chemical and high-temperature resistance. Generally, M716 is used with tin lead stripping plating tape M717 during plating operations. M716 is available in violet.

M803 Solder Masking Over Bare Copper (SMOBC) Tape

M803 is designed for use in SMOBC processes. It is used in combination with a pre-applied protective solder mask and provides full protection to the exposed holes in the board. M803 is applied at the plating line by either automated equipment or by hand, and serves as a failsafe line of demarcation at the connector tabs. The tape is used in conjunction with three process options: (1) plating gold over bare copper circuitry, (2) plating gold over bare copper circuitry after solder mask is applied and (3) plating gold after solder mask application and solder leveling. The tape is constructed of silicone adhesive and polyester backing. M803 is easily removed and leaves no adhesive residue, eliminating re-work. M803 is available in blue.

M734 and M788 Area Masking Tapes

M734 and M788 are low-cost substitutes for dry film in multi-layer processing to protect copper.

(Continued other side)

The tapes using natural rubber adhesives save as much as half the cost compared to silicone-based products. M788 is specially designed for thin core boards and flexible circuitry. Both tapes withstand high temperatures and chemicals. M734 is available in orange and M788 is available in aqua.

C663 Hot Air Leveling (HAL) Tape

C663 is applied to mask gold fingers, tab areas, and other sections of printed circuit boards during the hot air leveling process. C663 uses a silicone adhesive for the most demanding HAL applications. C663 adhesive is specially formulated to hold down and protect the gold fingers during rigorous HAL operations, yet remove cleanly from the board without splitting or leaving adhesive residue. Its thin construction reduces the damming at the solder/tape butt line and is a

proven, effective mask in double wrap applications. These features provide lower labor costs for cleaning and increase product line efficiency. C663 is available in yellow.

K-290ESD Hot Air Leveling (HAL) Tape

K-290ESD is constructed to fill the requirements of a high performance Thermoplastic (Polyimide Backing Materials). K-290ESD has excellent electrostatic discharge properties. The ESD additive reduces the electrostatic discharge that occurs upon tape removal. K-290ESD can safely and cleanly be removed from printed circuit boards. The proprietary adhesive system provides high electrostatic dissipation without sacrificing adhesive strength at extreme temperatures. K-290ESD offers excellent mechanical and electrical properties. K-290ESD is available with or without a liner.

CHR® Pressure Sensitive Adhesive Tapes — Printed Circuit Board Fabrication Tapes

Physical Properties/Part #	C663	K-290ESD	M716	M717	M734	M788	M803
Color	Yellow	Amber	Violet	Red	Orange	Aqua	Blue
Adhesive system	Silicone	Silicone	Rubber	Silicone	Rubber	Rubber	Silicone
Substrate	Polyester/ Paper	Polyimide Film	Polyester	Polyester	Polyester	Polyester	Polyester
Function	HAL	Protection	Fume Protection	Gold Plating	Area Protection	Area Protection	Gold Plating
Nominal Thickness:							
Backing	in. (mm)	0.0065 (0.165)	0.0010 (0.0254)	0.0010 (0.025)	0.0010 (0.025)	0.0010 (0.025)	0.0010 (0.025)
Adhesive	in. (mm)	0.0030 (0.076)	0.0015 (0.0381)	0.0011 (0.028)	0.0028 (0.071)	0.0006 (0.015)	0.0005 (0.013)
Total	in. (mm)	0.0095 (0.241)	0.0025 (0.635)	0.0021 (0.053)	0.0038 (0.097)	0.0016 (0.041)	0.0015 (0.038)
Nominal Adhesion Strength	oz/in. (g/cm)	60 (661)	20 (223)	18 (198)	30 (331)	6 (66)	5 (55)
Nominal Tensile Strength	lbs/in. (kg/cm)	25 (4.5)	25 (4.45)	25 (4.5)	25 (4.5)	25 (4.5)	25 (4.5)
Elongation	(%)	<10	50	100	100	100	100
Temperature Range	°F (°C)	-100 TO 500 (-73 TO 260)	-100 TO 500 (-73 TO 260)	0 TO 325 (-18 TO 163)	-100 TO 350 (-73 TO 177)	0 TO 325 (-18 TO 163)	0 TO 325 (-18 TO 163)

IMPORTANT NOTE TO PURCHASER: Values shown are typical and are not to be used for specifications. All data is subject to change without notice. Before using, the user should determine the suitability of the product for its intended use, and the user assumes all risk and liability in connection therewith. Specifications subject to change without notice.



Saint-Gobain Performance Plastics
Advanced Films and Fabrics—The Americas
14 McCaffrey Street
Hoosick Falls, NY 12090
Phone: (800) 962-2666
Fax: (518) 686-4840

Saint-Gobain Performance Plastics
Advanced Films and Fabrics—Asia
Suite 1203, No. 147
Chienkwo North Road Section 2
Taipei Taiwan, 104
Taiwan
Tel: 886 (2) 25034201
Fax: 886 (2) 25034202

Saint-Gobain Performance Plastics
Advanced Films and Fabrics—Europe
Clonroad
Ennis
County Clare
Ireland
Tel: 353 65 68 20988
Fax: 353 65 68 20993



Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product to be free from defects in materials and workmanship. Our only obligation will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risk, if any, including the risk of injury, loss or damage, direct or consequential, arising out of the use, misuse, or inability to use, this product. THIS WARRANTY IS IN LIEU OF THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. No deviation is authorized.

Saint-Gobain Performance Plastics Corporation assumes no obligations or liability for any advice furnished by it, or for results obtained with respect to those products. All such advice is given and accepted at the buyer's risk.